



ES947C/TB3

ES947WC/TB3

Cardioid Condenser Boundary Microphone

User Manual

Safety precautions

Although this product was designed to be used safely, failing to use it correctly may result in an accident. To ensure safety, observe all warnings and cautions while using the product.

Cautions for the product

- Do not subject the product to strong impact to avoid malfunction.
- Do not disassemble, modify or attempt to repair the product.
- Do not handle the product with wet hands to avoid electric shock or injury.
- Do not store the product under direct sunlight, near heating devices or in a hot, humid or dusty place.

Notes on use

- Do not swing or carry the microphone by the cable to prevent the microphone from becoming disconnected or damaged.
- Do not wind the cable around the rack or allow the cable to become pinched.
- The microphone should be placed on a flat, unobstructed mounting surface.
- Placing any object on a surface (such as a conference table) before its finish is fully cured may result in damage to the finish.

Using the product

Included accessories

1



2




3



- 1 Rubber isolators
- 2 Nut
- 3 7.6 m (24.9') Microphone cable (TA3F, XLR-M)


How to mount the product

Table/ceiling hole size (when using isolators)




(Unit: mm)

Table/ceiling hole size (when not using isolators)



(Unit: mm)


Example: Mounting on a table

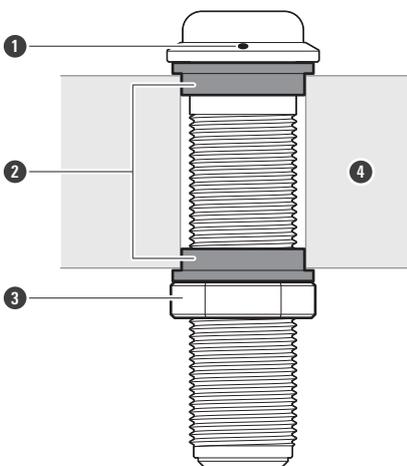

- ① Front-of-mic indicator
- ② Rubber isolators
- ③ Nut
- ④ Table


Connection procedure

The output connector is an XLR-M type with polarity as shown in the figure below.

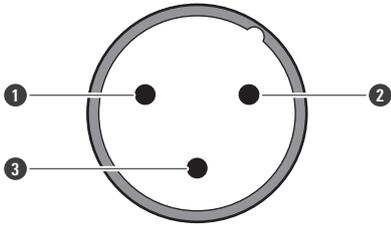

- ① PIN1 (ground)
- ② PIN2 (hot)
- ③ PIN3 (cold)

Dimensions

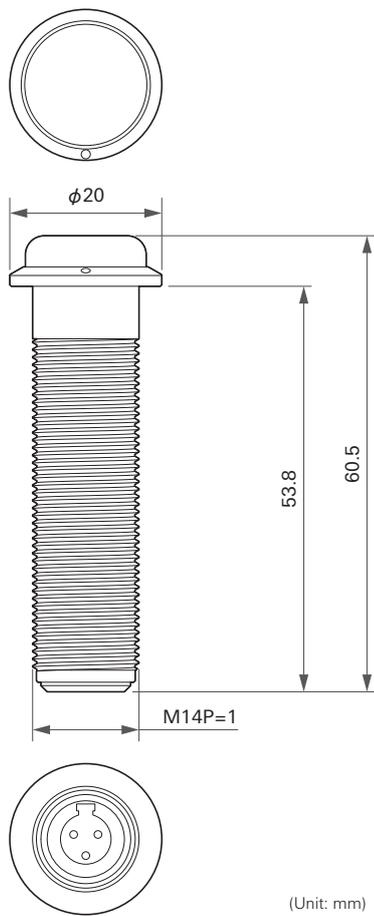


Specifications

Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Cardioid
Frequency response	70 to 15,000 Hz
Open circuit sensitivity	-38 dB (0 dB = 1 V/Pa, 1 kHz)
Impedance	100 ohms
Maximum input sound level	135 dB SPL (1 kHz at 1% THD)
Dynamic range	110 dB (1 kHz at Max SPL)
Signal-to-noise ratio	69 dB (1 kHz at 1 Pa, A-weighted)
Phantom power requirements	11-52 V DC, 2 mA
Weight	31 g (1.1 oz)
Dimensions	60.5 mm (2.38") long, 20 mm (0.79") head diameter
Output connector	TB3M-type
Included accessories	Rubber isolator × 2, Nut, 7.6 m (24.9') Microphone cable (TA3F, XLR-M)

- 1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL
- For product improvement, the product is subject to modification without notice.

Polar pattern/Frequency response


Polar pattern

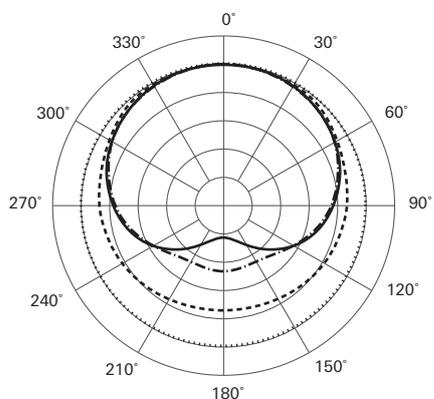

LEGEND

---	200 Hz	SCALE IS 5 DECIBELS PER DIVISION
—	1 kHz	
.....	5 kHz	
- - - -	8 kHz	

Frequency response

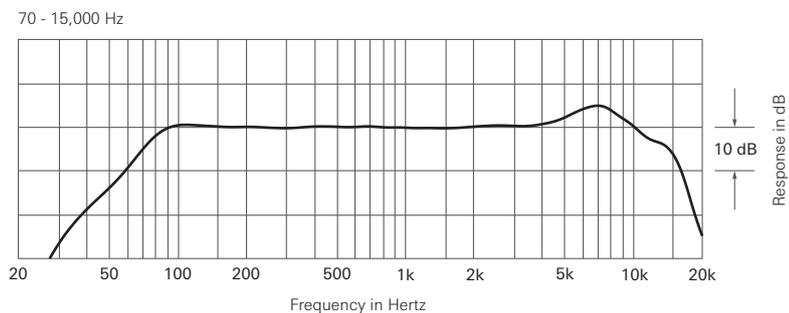

LEGEND

—	0°, 50 cm
---	-----------

株式会社オーディオテクニカ

〒194-8666 東京都町田市西成瀬2-46-1
www.audio-technica.co.jp

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan
www.audio-technica.com
©2021 Audio-Technica Corporation
Global Support Contact: www.at-globalsupport.com