



12 Total Outlets



Fireproof MOV



12V Trigger



Surge Protection



3 Filter Banks

The WB-600CH-SVCE-12 Power Conditioner offers the best of both worlds – professional-grade surge protection and noise filtration – so audio/video equipment is well protected and works effectively. It's built tough with a durable chassis and has a smart front panel that displays voltage / current, power, dual USB charging, and more.

FEATURES



Equipment Protection

Provides powerful surge protection for power, coax, and telephone/Ethernet cables. Automatically disconnects equipment during sustained under/over voltage conditions, and reconnects once it's safe.



Improved Audio/Video Performance

Removes noisy interference coming from other components/electronics, providing the best performance possible.



Cabinet/Shelf-Friendly

A sturdy chassis form factor and adjustable feet make this power conditioner perfect for cabinet/shelf placement, allowing components to be stacked on top as needed.

“Always-On” Outlets


Makes sure critical devices – like control systems and DVRs – are always ready when needed. The green LEDs illuminate when power is supplied to each outlet.

WATT BOX™

LIMITED LIFETIME WARRANTY

This WattBox™ product has a Limited Lifetime Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).



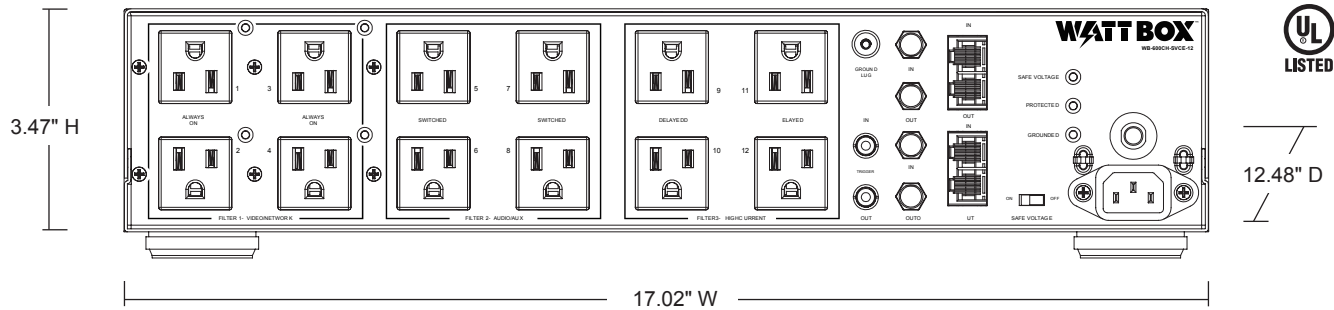

SPECIFICATIONS

AC Power	
Line Voltage	120V, 60Hz
AC Input Connection	IEC C-14
Power Cord Length	6 Feet
Circuit Breaker Rating	15A
UL Current Rating	12A
Voltage Protection Rating (UL 1449 3rd Edition)	500V
Joule Rating	6480 Joules
Surge Component	Ceramic Encased MOV
Protection Modes	L-N, L-G, N-G
Peak Impulse Current	396,000A
Disconnect Circuitry	Yes
Thermal Fuse	Yes
Safe Voltage Disconnect	
Over Voltage	138V AC +/- 5V AC
Under Voltage	88V AC +/- 5V AC
EMI / RFI Noise Filtration	
Filter Banks 1 & 2	80 dB, 300 kHz to 100 MHz
Filter Bank 3 (High Current)	80 dB, 300 kHz to 100 MHz
DC Trigger	
Connections	3.5 mm (1/8") mono mini plug
Input Voltage	3 - 24 VDC, Bidirectional
Input Current	3mA @ 3V, 30 mA @ 24V
Pass Through	No Delay
Output Voltage	12 VDC
Positive	Tip
Negative	Ring

Cable / Satellite Circuit	
Connections	Gold Plated "F" Connector
Surge Component	Gas Tube
Clamping Voltage	600V
Frequency Range	0MHz - 3.0 GHz
Insertion Loss	< 0.5 dB
Shielded	Yes
Bi-directional	Yes
Phone / LAN Circuit	
Connections	RJ45 (2 inputs and 2 outputs)
Accepts	RJ11 & RJ45
Surge Component	Sidactor & MOV
Clipping Voltage	RJ11:400V; RJ45:250V
Wires Protected	8 Wires
Outlets	
Type	NEMA 5-15
Numer of Outlets	12
Always On	Bank 1 (4 Outlets)
Switched	Bank 2 (4 Outlets)
Delayed (5 sec.)	Bank 3 (4 Outlets)
Display Link Outputs	
Display Communication	RJ45
Display Power	NEMA 5-15
UL Certifications	
UL 60950-1, UL 1449, UL 498, UL 497A/B, UL 1283	
Dimensions	
17.02" W x 3.47" H x 12.48" D	

* Specifications subject to change without notice.

LIMITED LIFETIME WARRANTY

This WattBox™ product has a Limited Lifetime Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

